

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number
WO 2005/024219 A1

(51) International Patent Classification⁷: **F02M 25/00**,
F04B 13/00, 17/03

(21) International Application Number:
PCT/EP2004/052022

(22) International Filing Date:
3 September 2004 (03.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0320880.8 5 September 2003 (05.09.2003) GB

(71) Applicant (for all designated States except US): **INERGY
AUTOMOTIVE SYSTEMS RESEARCH** (Société
Anonyme) [BE/BE]; Rue de Ransbeek, 310, B-1120
BRUSSELS (BE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **WRENCH, Nathan
James** [GB/GB]; Edgeview, Soudley, Church Stretton,
Shropshire SY9 7HZ (GB). **LEWIS, Helen Victoria**
[GB/GB]; Flat 24, Highsett, Hills Road, Cambridgeshire
CB2 1NY (GB). **NAYLOR, Simon James** [GB/GB];
10 Mander Way, Mowbray Road, Cambridgeshire CB1
7SF (GB). **JOHNSTONE, Charles Douglas** [GB/GB];
Yew Tree House, Paddock Close, Elston, Newark, Not-
tinghamshire NG23 5PJ (GB). **NEAVE, James Beeching**
[GB/GB]; 155 High Street, Chesterton, Cambridgeshire
CB4 1NL (GB).

(74) Agents: **JACQUES, Philippe** et al.; SOLVAY (Société
Anonyme), Intellectual Property Department, Rue de Rans-
beek, 310, B-1120 Bruxelles (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

[Continued on next page]

(54) Title: DOSING PUMP FOR A LIQUID FUEL ADDITIVE

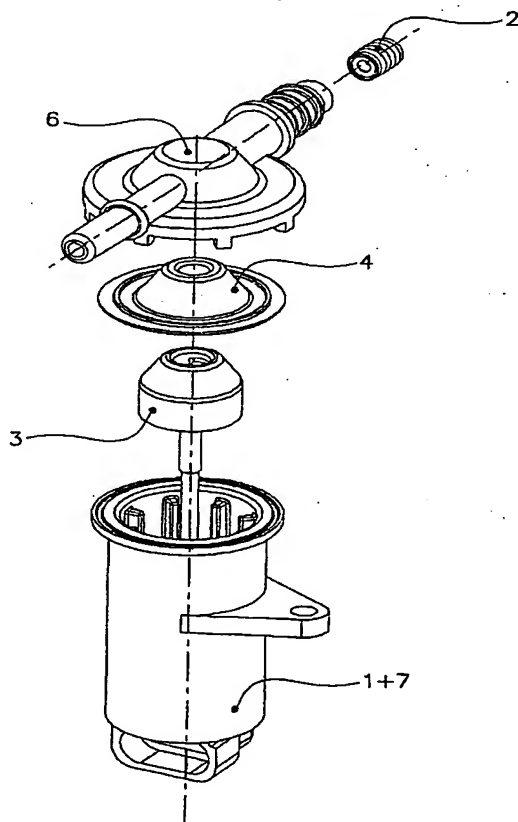

(57) Abstract: Dosing pump for a liquid additive in the fuel of a heavy fuel engine, said pump comprising a piston (3), a cylinder (1) and an actuator (7) for moving the piston (3) axially in the cylinder (1), said actuator (7) being a high resolution linear actuator.

WO 2005/024219 A1



CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,

TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only
- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

- 1 -

Dosing pump for a liquid fuel additive**Technical field**

The invention concerns a dosing pump for a liquid additive (possibly very concentrated) either in the engine of a vehicle; in the exhaust gases of said engine; or in the case of an engine using a heavy fuel (i.e. fuel having more than 9 carbon atoms; typically diesel), directly in said fuel and preferably, in the fuel tank.

The aim of additives like urea, liquid ammonia, and carbamates is to lower the emission of pollutants like NO_x and CO by the engine, while metallic salts (like salts of iron (Fe) or cerium (Ce) in solution in a hydrocarbon solvent) are generally used in order to lower the combustion temperature of the particles retained on the filter of the exhaust system of heavy fuel engines.

Prior art

Existing systems use a conventional piston pump to dose additive liquid where it has to be injected (mostly in the engine, the exhaust gases, the fuel tank, the fuel feed pipe or the fuel return pipe of said engine; this will generally be called "engine circuit" in the present application). This piston pump is a fixed volume pump, where the pump doses a constant pre-set volume per stroke (generally depending on the volume of the cylinder in which the piston moves).

US 2003/0136355 discloses a system for feeding a fuel additive inside a fuel tank by means of a metering pump which is integrated in the fuel-drawing module. This metering pump is a positive displacement pump (piston pump) delivering a constant volume of additive on each pump cycle. The total required dose is delivered by actuating the pump the required number of cycles. The disadvantages are:

- that any error associated with the piston volume is accumulated over the number of strokes, while an accurate dose is required for optimal results;
- of possible overdosing (because of the incapacity of delivering fractions of the cylinder volume), which is expensive considering the price of the additive; and
- that the solenoid valves used for the actuation are typically noisy.

The new invention aims at resolving at least some of these disadvantages.

- 2 -

Description of the invention

The invention consists mainly in replacing the fixed volume pump described above by a variable volume pump, i.e. a pump able of delivering a volume which is not necessarily pre-set.

5 Accordingly, the present invention concerns a dosing pump for a liquid additive of the engine circuit of a vehicle, said pump comprising a piston, a cylinder and an actuator for moving the piston axially in the cylinder, the actuator being a high resolution linear actuator.

10 Thanks to the use of such an actuator, the pump according to the invention is a variable volume pump, able of delivering any required volume and being self-priming.

 The pump according to the invention generally comprises besides the piston, cylinder (housing) and actuator, a manifold comprising at least one inlet and one outlet check valve for respectively inhaling and exhaling the additive.
15 Such valves may be of any type; they are preferably passive (i.e. valves functioning automatically, i.e. not being actuated by any other means than the flow of liquid through them), one-way valves (i.e. they only allow one flow direction of liquid through them).

 The variable volume pump of the invention is preferably a syringe pump,
20 i.e. a pump in which the piston contacts a solid surface (which may be the end of the pump cylinder bore or the inner surface of the manifold) at the end of each dose cycle. By "dose cycle" is meant the complete sequence of operations between 2 successive inhalations of the pump. So at the end of each cycle, the syringe returns to an end stop, ensuring high repeatability. Besides, the volume
25 of additive left in the pump body after each cycle is minimized, which in turn minimizes the potential risk of leaks of gas or vapor from the additive that may occur during temperature changes.

 By "high resolution linear actuator" according to the invention is meant in fact an actuator of which the linear position can be controlled to a high
30 resolution. By "high resolution" is meant that the accuracy must be of less or equal to 1 mm, preferably less or equal to 0.1 mm, more preferably less or equal to 50 μ m. The linear actuator used in the invention preferably comprises an electrical stepper motor which moves the piston at very small increments, to achieve very high accuracy per single step, and which is controlled by a
35 controller. The advantages of such an actuator are its small size (compactness) and its low power consumption, when compared to a solenoid pump for instance.

- 3 -

Most preferably, the linear actuator is driven by a rotary electric motor through a gear reduction. The benefits being that:

- the gear reduction affords high precision in linear position that corresponds to a high accuracy in volumetric dosing of the additive and is not noisy
- 5 - the gear reduction affords high resistance to piston travel when the rotary electric motor is not energized, thus ensuring that the piston maintains a seal against the inlet and outlet apertures.

Other possibilities for controlling the actuator's linear position to a high resolution are :

- 10 (A) a crank driven through a gear reduction so that the linear position of the crank end (piston) may be controlled to a high degree of accuracy (and reversed at any point in the cycle); and
- (B) a linear actuator driven by a linear electric motor such as a piezoelectric motor.

- 15 In the case of the crank (embodiment A), a long crank can be used to give largely linear motion of the piston.

According to one embodiment, the pump according to the invention has a capacity equal to the maximum dose required (considering the volume of fuel involved), and dispenses a volume up to the maximum dose. This means that the
20 required additive volume is delivered through only one cycle of the pump, which is indeed a very silent solution, but of somewhat larger size.

According to another, preferred embodiment, the pump according to the invention has a shrunk capacity (i.e. lower than the maximum dose) in order to fit into more locations on the vehicle. The pump dispenses the required additive
25 volume by one or more injections (i.e. through one or more pump cycles).

In that embodiment, the piston exactly fits the manifold so that all the additive is repeatably squeezed out. This means the pump only needs to be accurate when inhaling.

The pump according to the invention generally uses a seal to ensure
30 tightness between the piston and the cylinder. This seal may be a sliding seal, disposed radially on the piston head and sliding with the piston inside the cylinder. But preferably, this seal is a low friction dish seal (diaphragm) having at least one portion attached to the cylinder and moving with it. The benefits of such a seal are that:

- 4 -

- much lower forces are presented to the motor when the piston is first moved after an important period of non-use, avoiding slipping of the motor and guaranteeing the pump accuracy;
- a layer of additive is not left on the internal surface on the syringe to dry and flake off, avoiding potential electrical short circuits or jamming of mechanism; and
- leakage is impossible and in consequence the accuracy is conserved.

Another advantage of the diaphragm seal is that it can accommodate radial movement, making it quite compatible with a fixed crank linear actuator (embodiment A described above).

In that regard, it is worth noting that although the main object of the present invention is a pump driven by a high resolution linear actuator, all the advantages of the diaphragm seal described above are also present in the case of a pump without such an actuator. While such a pump is known from US 4,874,299, the pump described therein is a reciprocating one, i.e. a fixed volume pump and not a variable volume pump. Accordingly, a variable volume pump with a diaphragm which would be as described above except for the presence of a linear actuator, is another aspect of the present invention, although for dosing diesel additives, the choice of a linear actuator is preferred.

The materials of which the pump according to the invention are made of are chosen to be resistant to the additive to be dosed. Generally, the piston and cylinder are in plastic (like PBT (polybutylene) for instance) and the seal(s) are elastomeric, most preferably in a fluorinated silicone elastomer. In the case of a dish seal, its shape and material are very important to prevent stretching of the seal when the pump 'inhales'. The profile of the seal is preferably designed so that the forces (and hence, the stretching of the seal) are minimized during inhalation. Other means may include material reinforcement of the seal or coating the seal with a material like PTFE (polytetrafluoroethylene, commonly called "Teflon") to prevent stretch (and increase material compatibility).

In dosing pumps using a dish seal, the volume dosed is not linear with movement of the piston. However, the shape of the seal is adapted to minimize that phenomenon and the remaining non-linearity is removed electrically (by the controller that drives the motor).

Preferably, the dosing pump according to the invention is part of the fuel system of a heavy fuel engine. Therefore, according to another aspect, the present invention concerns a fuel system equipped with a dosing pump as

- 5 -

described above. By fuel system is meant all the elements/devices which are used in the fuel handling (storage, supply and return in the case of diesel). Such a system generally comprises at least a fuel tank, a filler pipe, venting lines, and fuel supply/return lines, as well as an additive reservoir in the frame of the present invention.

According to that embodiment, the pump is preferably located in one of the following locations within the fuel system:

- a. in the filler pipe area, especially if the additive reservoir is located there as described in patent application FR 03.13073;
- 10 b. between the additive reservoir and the fuel tank;
- c. on the fuel tank, above or under it (especially if the additive reservoir is integrated to the fuel tank as described in patent application FR 04.00856); in that case, it preferably is close to the fuel drawing module fixed on the tank;
- d. within the fuel drawing module as described in the above mentioned US
- 15 patent;
- e. close to or on the fuel return line (returning hot fuel from the injection rail of the engine to the fuel tank).

It is namely so that a common pump body design can be incorporated into many different system configurations, through the use of bespoke fluid manifolds as described above.

The controller of the dosing pump according to that embodiment may be told the amount of additive to dose, or preferably, the amount of fuel that has been added (so that the processor can calculate the required dose - only the controller needs to know the concentration and type of additive in use).

25 The present invention is illustrated in a non limitative way by figures 1 to 4, which in fact depict 2 preferred embodiments of the present invention. Figures 1 and 2 relate to a syringe pump with a sliding seal and figures 3 and 4, to a syringe-membrane pump. In these figures, identical numbers refer to identical/similar items.

30 **Description of figures 1 and 2: embodiment 1**

These pictures represent a syringe pump with sliding seal having a capacity of about 8 ml.

The syringe inhales through an in-hole (1) in manifold (6), seal (5) and one-way valve (2) the additive liquid by the piston (3) performing only a single

35 proportional course at calculated dosing quantity.

- 6 -

The piston (3) moves by means of a stepper motor and gear reduction which are part of an actuator (7). There is a sliding seal (4) between the piston (3) and the cylinder (1).

5 After the liquid inhalation, the syringe pushes through a out-hole (O) in support (6), seal (5') and one-way valve (2') the additive liquid by the piston (3) to the diesel fuel tank.

Description of figures 3 and 4: embodiment 2

These pictures represent a membrane-syringe pump with dish seal having a capacity of about 0.5 ml.

10 Its storage/reset position is shown in figure 3. The piston pushes the seal (4) up against the manifold (6), i.e. its end-stop.

The seal (4) is fixed between the cylinder (1) and manifold (6) at its perimeter (forming an additive tight seal) and attached to the piston (3) via its flat top (F). When the piston (3) moves, the top of the seal (F) moves with it and a void is
15 created between the manifold (6) and the seal (4).

The syringe inhales through an in-hole in manifold (6) and one-way valve (2) the additive liquid by the piston (3) performing a multiple of strokes up to calculated dosing quantity.

20 The piston (3) moves by means of a stepper motor and gear reduction which are part of an actuator (7) which in this case is made in one piece with the cylinder (1).

The following sequence defines one cycle of the pump:

- Motor is driven by the controller so that it rotates through a set number of steps. The number of steps is equivalent to predetermined linear travel.
- 25 - As the piston (3) moves, the cracking pressure of the inlet valve is exceeded and additive flows into the void created between the manifold (6) and seal (4).
- The piston (3) stops when the motor has turned the number of steps instructed by the controller. It then changes direction and the outlet check valve (not shown) and diesel tank check valves open once their combined cracking
30 pressures have been exceeded. Additive flows from the void and into the diesel tank until the piston (3) bottoms out against the manifold (6).

The volume of additive dosed is dependent on the volume of the void formed between the manifold (6) and the seal (4). This volume is determined by the convolution formed by the seal (4) when the piston (3) is displaced.

35 A dose comprises of one or more cycles, between each cycle, the motor drives the linear actuator to its storage/reset position.

- 7 -

Pump resolution, size and accuracy of a single step, is a function of the stepper motor resolution and is constant and independent of the volume delivered.

5 Syringe-membrane pump delivers the entire pump volume within a short period of time.

Common features of embodiment 1 (figures 1 and 2) and 2 (figures 3 and 4)

Both pumps allow to perform a dosing of very concentrated additive liquid (metal concentration rate 10% for instance) for an addition of diesel fuel (between 5 and 120 liters).

10 The minimum linear step of the piston (3) is very small, in the range of 10 to 50 μm .

The electric power consumption is very low (for instance 5 Watts at 12 Volts).

15 Two simple passive valves are used and the system is flexible across a wide range of dose levels.

This concept is not noisy since it uses passive valves instead of solenoid valves.

- 8 -

CLAIMS

1 - Dosing pump for a liquid additive in the fuel of a heavy fuel engine, said pump comprising a piston (3), a cylinder (1) and an actuator (7) for moving the piston (3) axially in the cylinder (1), characterized in that the actuator (7) is a
5 high resolution linear actuator.

2 - Dosing pump according to the preceding claim, characterized in that the pump comprises a manifold (6) having at least one inlet (2) and one outlet (2') check valve which are passive, one-way valves.

3 - Dosing pump according to any of the preceding claims, characterized in
10 that it is a syringe pump of which the piston (3) contacts a solid surface at the end of each dose cycle.

4 - Dosing pump according to any of the preceding claims, characterized in that the linear actuator (7) is driven by a rotary electric motor through a gear reduction.

15 5 - Dosing pump according to any of the preceding claims, characterized in that it has a capacity equal to the maximum dose required so that the required additive volume is always dispensed through only one cycle of the pump.

6 - Dosing pump according to any of claims 1 to 4, characterized in that it
20 has a capacity lower than the maximum dose so that the required additive volume is dispensed through one or more pump cycles.


7 - Dosing pump according to any of the preceding claims, characterized in that it comprises a seal (4) to ensure tightness between the piston (3) and the cylinder (1).

8 - Dosing pump according to the preceding claim, characterized in that the
25 seal (4) is either a sliding seal, disposed radially on the piston (3) head and sliding with the piston (3) inside the cylinder (1), or a low friction dish seal having at least one portion (F) attached to the piston (3) and moving with it.

9 - Fuel system comprising a liquid fuel additive dosing pump according to any of the preceding claims.


- 1/4 -

Fig. 1

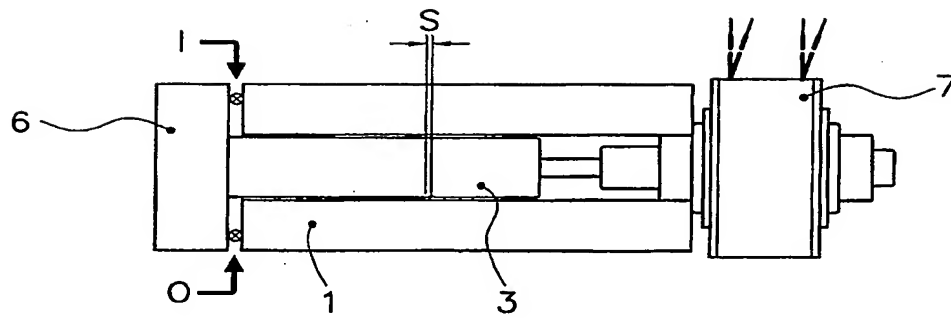


- 2/4 -

Fig. 2

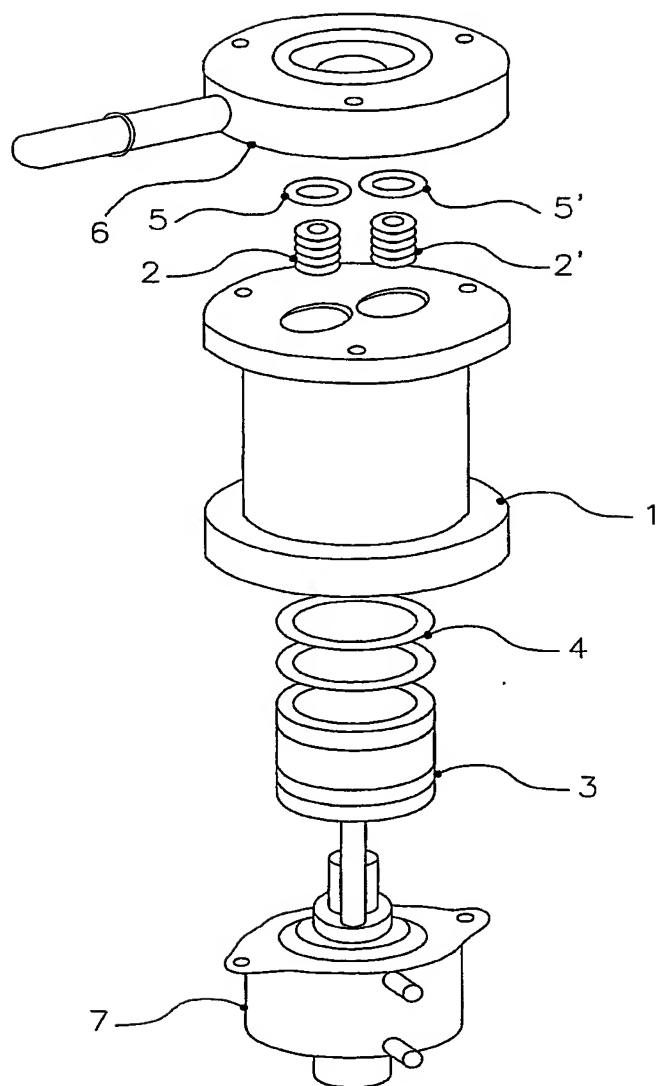


- 3/4 -

Fig. 3

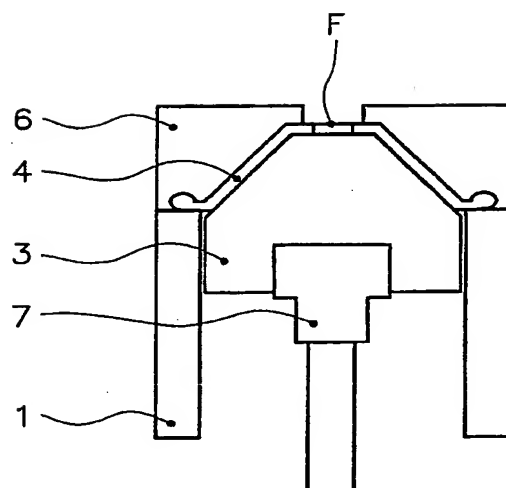

- 4/4 -

Fig. 4

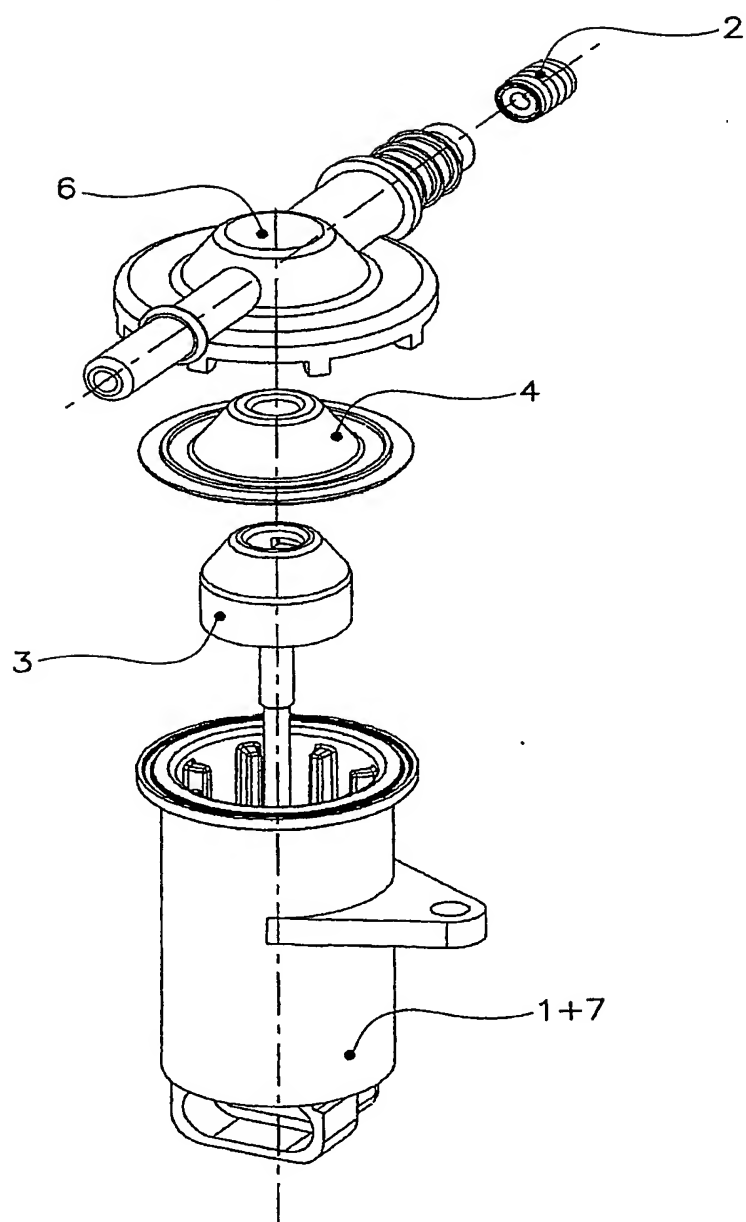

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP2004/052022

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F02M25/00 F04B13/00 F04B17/03

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F02M F01N F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 756 456 A (GEORGI) 4 September 1973 (1973-09-04)	1-3,6
Y	the whole document	4,5,7-9
Y	DE 199 06 482 C (COPARA AG VADUZ) 7 September 2000 (2000-09-07) column 1, line 45 - column 2, line 52; figures 1-4	4,5
Y	US 4 449 650 A (SAWATZKI) 22 May 1984 (1984-05-22) column 3, line 41 - line 52; figure 1 ----- -/-	7,8



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

2 December 2004

Date of mailing of the international search report

09/12/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Zoest, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/052022

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 11, 26 December 1995 (1995-12-26) & JP 7 224734 A (TOYOTA MOTOR CORP), 22 August 1995 (1995-08-22) abstract; figure 1	9
X	EP 1 132 616 A (BMO TREUHAND UND VERWALTUNG AG) 12 September 2001 (2001-09-12) the whole document	1,3,6-8
X	DE 36 00 341 A (SAPHIRWERK IND PROD) 9 July 1987 (1987-07-09) the whole document	1-3,5,7
A	EP 0 614 002 A (RHONE POULENC CHIMIE) 7 September 1994 (1994-09-07) the whole document	1-9

INTERNATIONAL SEARCH REPORT



Information on patent family members

International Application No

PCT/EP2004/052022

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3756456	A	04-09-1973	CA 993083 A1	13-07-1976
			DE 2325902 A1	13-12-1973
			FR 2185790 A1	04-01-1974
			JP 49051980 A	20-05-1974
			JP 57049849 B	25-10-1982
			US RE29495 E	13-12-1977
DE 19906482	C	07-09-2000	DE 19906482 C1	07-09-2000
US 4449650	A	22-05-1984	NONE	
JP 7224734	A	22-08-1995	NONE	
EP 1132616	A	12-09-2001	EP 1132616 A1	12-09-2001
			AU 3530201 A	17-09-2001
			WO 0166944 A1	13-09-2001
			EP 1266139 A1	18-12-2002
			JP 2003526049 T	02-09-2003
			US 2003113218 A1	19-06-2003
DE 3600341	A	09-07-1987	DE 3600341 A1	09-07-1987
			EP 0228628 A2	15-07-1987
			JP 62165586 A	22-07-1987
			US 4808092 A	28-02-1989
EP 0614002	A	07-09-1994	FR 2702009 A1	02-09-1994
			AT 141386 T	15-08-1996
			AU 668456 B2	02-05-1996
			AU 5526594 A	01-09-1994
			BR 9400645 A	27-09-1994
			CA 2115803 A1	24-08-1994
			DE 69400365 D1	19-09-1996
			DE 69400365 T2	20-02-1997
			DK 614002 T3	09-12-1996
			EP 0614002 A1	07-09-1994
			ES 2093492 T3	16-12-1996
			GR 3021471 T3	31-01-1997
			HU 71757 A2	29-01-1996
			JP 2548898 B2	30-10-1996
			JP 6257516 A	13-09-1994
			KR 9708661 B1	28-05-1997
			MX 9401329 A1	31-08-1994
			US 5421295 A	06-06-1995

THIS PAGE BLANK (USPTO)